

AUTOMATIC DISPENSING SYSTEM TYPE 3600 FOR SANDWICH PANEL MANUFACTURING WITH TWO COMPONENT ADHESIVES AND RESINS SUCH AS POLYURETHANE, EPOXY AND MS-POLYMERS



SPECIFICATIONS

Mixing ratio:	Fixed: 100:100-100:4	Capacity:	Up to approx. 20 l/min approx 10 m ² /min
Mixing accuracy:	±2%	Spreader width:	500 mm standard
Machine weight:	Approx 2500 kg	Dimensions:	Arm length: up to 4000 mm Track width: 1200 mm Machine length: 2000 mm Machine width: 1600 mm
Air Pressure req.:	5 bar volume 1500 l/min	Options:	RS 232 communication to PC Massflow meter
Current req.:	400 Volt, 50 Hz 3 face	Pumps:	As per specification; depending on capacity requirement
Container vol.:	200 l drum or 1000 l container		
Viscosity:	1-50 000 mPas (cp) (flowable)		

System 3600 is designed for automatic dispensing of two component medium viscosity adhesives and resins. The system is suitable for sandwich panel industrial production such as truck bodies, mobile chassis, caravans etc, where an even and accurate adhesive spreading is required. *System 3600* improves the quality of the final product, simplifies production and improves the working environment.

The machine works automatically on wheel tracks along a multiple of working tables of up to 60 metres. The machine is easy to handle with the operator panel. To set the panel size, locate the laser pointer to the panel corner and push start button. Please ask for a CD-ROM demo disc.

The complete system also includes a meter unit 3200 and mixer gun with static disposable mixing tubes and spreader bar. Base and hardener pumps can be placed a long distance from the machine which simplifies the adhesive container or drum handling.

The meter unit in *System 3600* contains two displacement pistons, which are mechanically linked together and the mixing ratio is fixed between base and hardener. Massflowmeter units for base and hardener will control mixing ratio and coat weight.

Barkvall Engineering AB
Box 7074
SE-192 07 Sollentuna
Sweden

Telephone: +46-(0)8 444 37 70
Fax: +46-(0)8 444 37 71
E-mail: engineering@barkvall.com
Internet: www.barkvall.com

Visiting address: Kappetorpsvägen 11
Båtsmanstorp
192 77 Sollentuna
Sweden



***AUTOMATISKT APPLICERINGSSYSTEM TYP 3600 FÖR
TVÅKOMPONENT EPOXI, POLYURETAN, SILIKATLIM
OCH MS-POLYMER***

***AUTOMATIC DISPENSING SYSTEM TYPE 3600 FOR TWO
COMPONENT EPOXIES, POLYURETHANES,
SILICATES AND MS-POLYMERS***

*Barkvall Engineering AB
Box 7074
SE-192 07 Sollentuna
Sweden*

*Telephone: +46-(0)8 444 37 70
Fax: +46-(0)8 444 37 71
E-mail: engineering@barkvall.com
Internet: www.barkvall.com*

*Visiting address: Kappetorpsvägen 11
Båtsmanstorp
192 77 Sollentuna
Sweden*



***AUTOMATISKT APPLICERINGSSYSTEM TYP 3600 FÖR
TVÅKOMPLEMENT EPOXI, POLYURETAN, SILIKATLIM
OCH MS-POLYMER***

***AUTOMATIC DISPENSING SYSTEM TYPE 3600 FOR TWO
COMPONENT EPOXIES, POLYURETHANES,
SILICATES AND MS-POLYMERS***


Barkvall Engineering AB
Box 7074
SE-192 07 Sollentuna
Sweden


Telephone: +46-(0)8 444 37 70
Fax: +46-(0)8 444 37 71
E-mail: engineering@barkvall.com
Internet: www.barkvall.com

Visiting address: Kappetorpsvägen 11
Båtsmanstorp
192 77 Sollentuna
Sweden

Automatisk limmaskin för tvåkomponentlim för tillverkning av sandwichpaneler

Automatic spreader for two component adhesive for manufacturings of sandwich panels

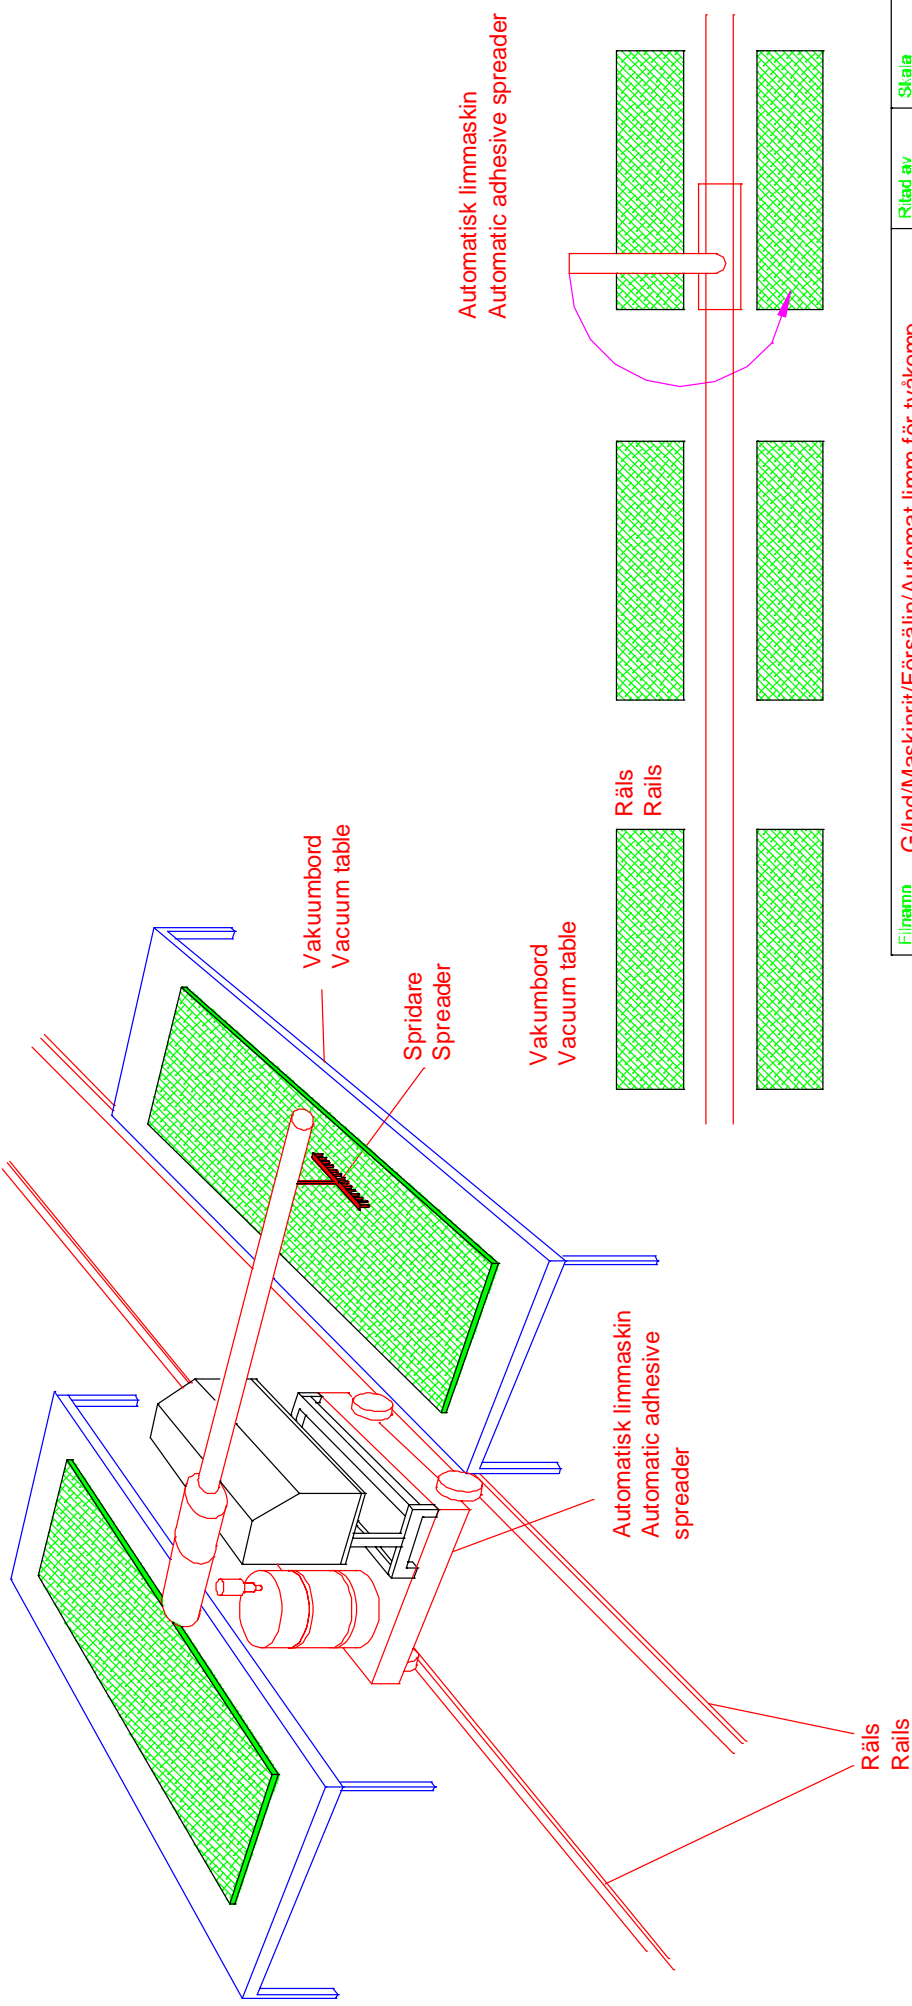

<p>  Barkvall <small>energiteknik</small> Maskinsystem 192 07 SOLLENTUNA </p>	<p> Filnamn G/Ind/Maskinrit/Försäljn/Automat limm för tvåkomp Titel Automatisk limspridare två-komp. PUR Automatic adhesive spreader for two comp. PUR </p>	<p> Ritad av AG Datum 010124 R/lin.nr 3600 </p>	<p> Skala XXX Ändringsdal XXX </p>
--	---	--	--